Carrara DC Smart Series Installation Guide

Thanks for choosing our Carrara DC Smart Series ceiling fan. We strongly recommend that you read this manual carefully before installation.



Models Parameters (Fan and LED Light):


1220mm 4 Blade DC WiFi Ceiling Fan Matt Black with light MCDC1243M 1220mm 4 Blade DC WiFi Ceiling Fan Matt White with light MCDC1243W

Part List: Qty 1x Motor assembly


Qty 1x Hanging bracket


Qty 1x Instruction manual Qty 1x Remote & Receiver

Slope Ceiling



Qty 1x light kit pan Qty 1x LED light kit Qty 1x acrylic lampshade





Qty 1x Screw kit


Qty 4x Blades

Corrugated Ceiling


Apex Ceiling


How to Assemble

Application Flat Surface / Ceiling

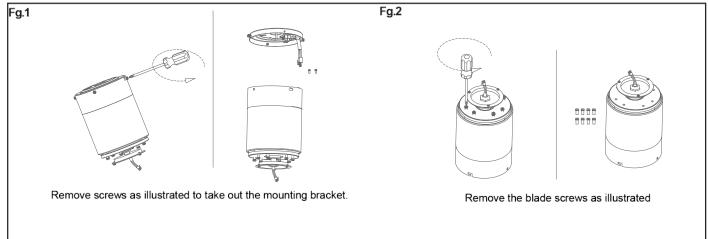



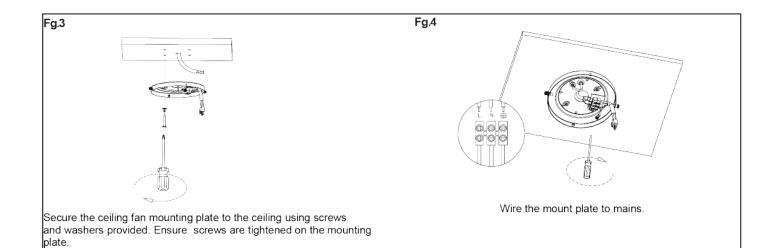

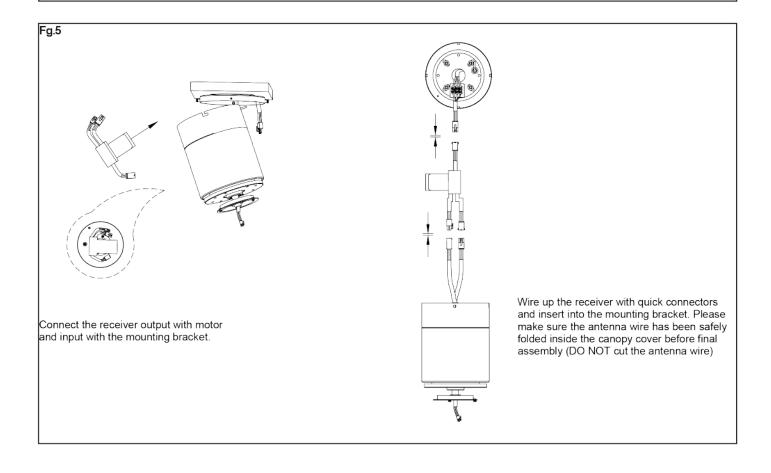

Important Reminders

Receiver must be correctly installed in the mounting bracket When the transmitter cannot control the receiver, please check


i) has sufficient battery in the transmitter

 ii) any existence of similar remote controlled products nearby that cause interference Replace battery if getting low as this will affect sensitivity of the transmitter Take the battery out from the transmitter when leaving used for a long time to avoid battery leaks Isolation switch MUST be connected in the line


E: sales@martecltd.com.au | P: 02 8778 7500 www.martecaustralia.com.au




How to Install

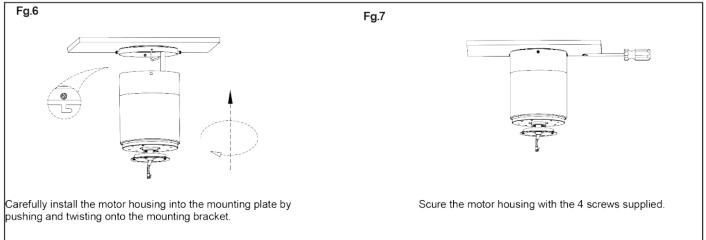

How to Install Blades

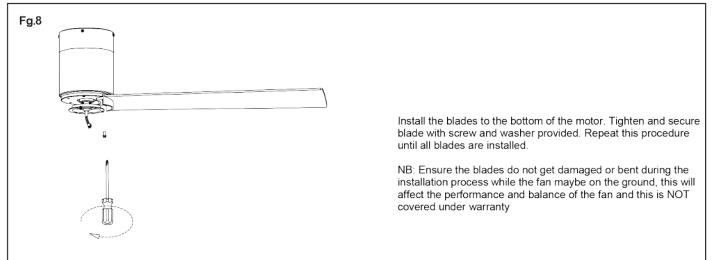

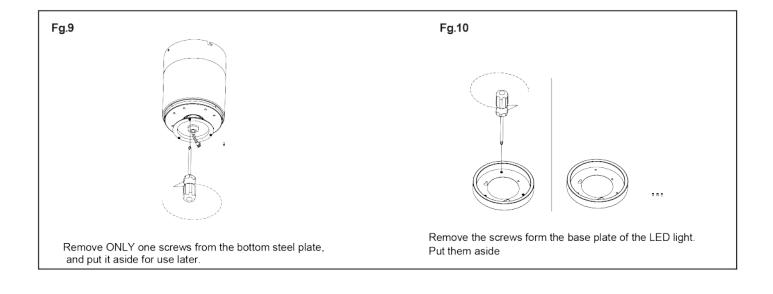







How to Install / light kit pan


bracket.



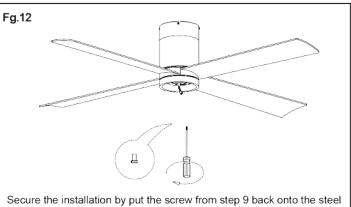

th the two remaining plate. ely to install it onto the


Fg.13

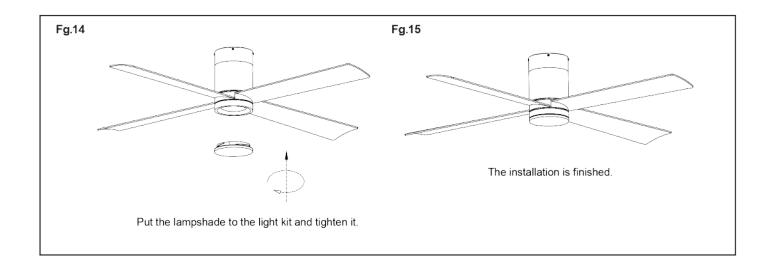





Wire Connections

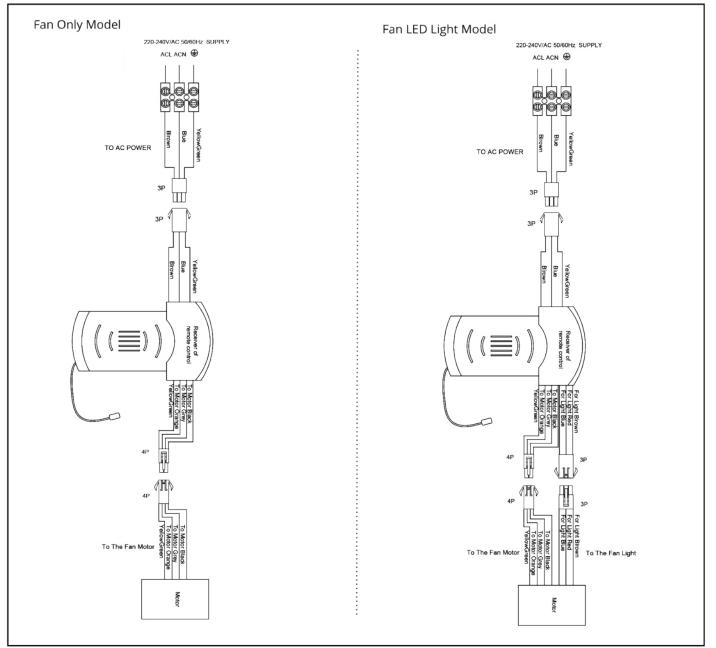

6* Year Warranty

∕@С€ <mark>√к₀нѕ</mark> Visit our website for details https://www.martecaustralia.com.au/wp-content/uploads/2023/05/Warranty-Statement_Cooling.pdf

WARNING

- Installation of fans MUST follow SAA standards and meet local authority regulations. .
- Installation MUST be carried out by a qualified and licensed electrician. .
- Fan and light MUST be earthed.
- Bracket MUST be firmly attached to a flat solid structure or timber frame. •
- DO NOT mix blades from one model to another, all blades MUST be replaced if damaged.
- . The warranty is VOID if product is not installed according to this installation guide.



Smart Life matching process, please follow the steps:

1.Download the "Smart Life" APP on your smart devices by scanning the QR code below with camera.



2.Turn on WiFi and Bluetooth on your smart devices. Ensure it's connected to a 2.4GHZ WiFi.

3.Open the APP, follow the steps to register new user account or login existing account.



4.Follow instructions in main manual (steps can also be found on the back of the remote) to put the fan into WiFi pairing mode. If the operation is successful, go to step 6. If the fan has previously been paired or you can't get it to work, please go to step 5 to RESET the fan.

5.RESET the fan. This step is NOT necessary if the fan has successfully entered WiFi pairing mode in the last step, if not, try to RESET the fan: turn on the fan, power off after 10 seconds, power on again after 15 seconds, long press "Fan Stop" for 5 seconds, if "beep beep" are heard, the reset is successful. If "beep beep" is not heard, the reset is failed, please repeat this step.

6.Once the fan has entered WiFi pairing mode, open the APP again on the smart device. Click "Add Device" in the middle or the "+" on the top right of the screen.


1:57 Q			
	1		
	-	rvices	
	Add 0	levice	

7.The auto scan should begin automatically, and the fan should show up at the top of screen within a few seconds.

Note: If the fan is not showing up, you can add it manually by clicking and navigate to: >Add Manually >Small Home Appliance > Fan

1:57 🔾			al 🕈 🖬
<	Add	Device	Ξ
	ing for nearby o pared pairing mo	levices. Make sure idu.	your device
	Add N	fanually	
Electrical		Socket	
Lighting	1.1 B	1.1 8	8.1 .0
Sensors	Plug (BLE+WFFI)	Socket (MI-FI)	Socket (Zigbee)
Large Home Appliances	11	1.1	1.1 .e
Small Home Appliances	Sociat (BLE)	Dualband Plug (2.40Hz850Hz)	Socket (ND-IoT)
Kitchan Appliances	2		
Exercise & Health	Sockat (offwar)		
Camera & Lock		Power Strip	
Gateway Cantrol	+ 99	- VV	+ 92
Outdoo) Travel	Power Strip (BLE+WHPI)	Power Strip (MI-PI)	Ponier Strip (Zigbee)



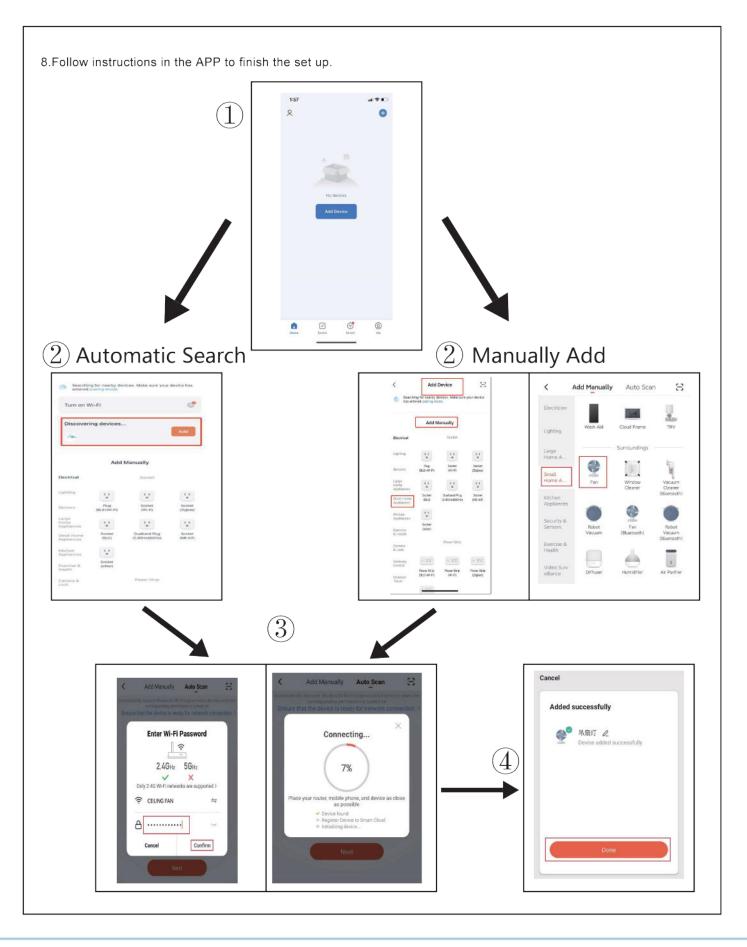



WiFi / Remote Control Pairing

Fan only model		•	
 Pairing the remote control 1. Turn on the ceiling fan. 2. Within the first 20 seconds, continue pressing the U button until you hear a "beep" sound. ie. It is paired. If you don't hear a "beep" sound, repeat step 1 and step 2 again. 		 Pairing the remote control 1. Turn on the ceiling fan. 2. Within the first 20 seconds, continue pressing the button until you hear a "beep" sound. ie. It is paired. If you don't hear a "beep" sound, repeat step 1 and step 2 again. 	
Entering WiFi Pairing mode: 1.Turn on the power. 2.Within the first 20 seconds, press and hold the " ? " button until a "beep" s heard.	1h 4h 8h	Entering WiFi Pairing mode: 1.Turn on the power. 2.Within the first 20 seconds, press and hold the " " button until a "beep" is heard.	1h 4h 8h
 Continue step connect on your smart devices to complete the pairing. 	steps.	 3.Continue step connect on your smart devices to complete the pairing. If you don't hear a "beep" sound, repeat the abov 	e steps.
A.Continue step connect on your smart devices 3.Continue step connect on your smart devices to complete the pairing. If you don't hear a "beep" sound, repeat the above FAN OFF (): to switch off the fan. SLEEP MODE Image: Turn on the fan at an extra lo create a general breeze. SPEED BUTTON: 1 = lowest speed. 6 = highest s NATURAL WIND MODE : designed for the eld	steps. wer speed to peed.	to complete the pairing.	e steps. a lower speed to st speed. elderly and

Visit our website for details https://www.martecaustralia.com.au/wp-content/uploads/2023/05/Warranty-Statement_Cooling.pdf

WARNING

- Installation of fans MUST follow SAA standards and meet local authority regulations.
- Installation MUST be carried out by a qualified and licensed electrician.
- Fan and light MUST be earthed.
- Bracket MUST be firmly attached to a flat solid structure or timber frame.
- DO NOT mix blades from one model to another, all blades MUST be replaced if damaged.
- The warranty is VOID if product is not installed according to this installation guide.

